

# GSM Mobile Based Smart Automation and Digital Circular Board

<sup>1</sup>D Prasanthi, <sup>2</sup>Dr. G Ramesh Babu, <sup>3</sup>A Venkateswara Rao, <sup>4</sup>S S Kiran

<sup>1</sup>PG Student, <sup>3</sup>Principal, <sup>2</sup>Associate Professor, <sup>4</sup>Assistant Professor  
Electronics and Communication Engineering

<sup>1,2,3</sup>SRI SIVANI INSTITUTE OF TECHNOLOGY, SRIKAKULAM, INDIA

<sup>4</sup>SANKETIKA INSTITUTE OF TECH & MANG, VIZAG, INDIA

**Abstract:** The project presents a digital circular board and a smart home automation system, hospitals, railway stations, bus stops, institutions & industries using a GSM SIM900 module with smart android application. These idea behinds provide to users with a simple, fast and reliable way to keep up important circulars in Liquid Crystal Display (LCD). The message can be sent through an android application by using proposed system to the GSM SIM900 module. Similarly, a smart home automation system has been developed where as hospitals, railway stations, bus stops, institutions & industries appliances like light, fan, digital displays etc. can be switched on or off using. The android application, the appliances can be controlled and notices or circulars can be put up in an LCD display from any location in the world. The project consists of a 32-bit ARM based microcontroller LPC2148 Development Board, GSM SIM900 module, an LCD, The proposed system can be used anywhere irrespective of the place of deployment provided mobile network connectivity is available. A GSM MOBILE based system is flexible, durable without any risk of getting hacked. Such a system has a low cost of installation and maintenance.

**Index Terms**— Circular Digital Board, LPC2148 Development Board, GSM SIM900, Android, Relay, ARM 7

## I. INTRODUCTION

### A. INTRODUCTION ABOUT PROJECT

In this project, hardware capable of controlling all appliances and displaying notices electronically using an android application has been built. So, the hardware can perform broadly two functions. For controlling appliances, the system can be used in much different kind of situations where a user can switch on/off any home appliance connected to it from anywhere using an android application installed in a smart phone. In order to display notices or circulars, a user can use the same application to type a notice and click on the send button to get it displayed. Both the functionality can be used only if sufficient balance amount is left in the user's SIM card since each access transacts a fixed amount for SMS. The hardware consists of an ARM based microcontroller LPC2148 that communicates to the application through a GSM mobile communication network module which uses a SIM card to receive messages. LPC2148 itself retrieves message and sends signal to switch on/off a device or display a notice. A GSM based system is flexible, durable without any risk of getting hacked. Such a system has a low cost of installation and maintenance.

### B. INTRODUCTION TO EMBEDDED SYSTEMS

What is embedded system?

An Embedded System is a combination of computer hardware and software, and perhaps additional mechanical or other parts, designed to perform a specific function. An embedded system is a microcontroller-based, software driven, reliable, real-time control system, autonomous, or human or network interactive, operating on diverse physical variables and in diverse environments and sold into a competitive and cost conscious market.

## II. RELATED WORK

By using ARM 7 LPC2148 designed GSM based Smart Home and Digital Notice Board, in this paper controlling Home appliances and send message to Digital notice board [1], Some of the home automation systems developed earlier includes a PIC16F887 IC integrated with GSM module enabling SMS based automation [2]. However, unlike this project, it did not use any android application in it and involved extra task of writing message. In [3], Elkamouchi also gave a prototype of Smart automation home and used sensors and actuators for the home appliances to get them connected to microcontroller. Another smart home was built in [4], studied a multilevel home security system (MHSS) [5]. Observed Wireless home and industrial automation security system using GSM [6]. By using GSM based anti-theft security system using Atmel commands in [7] and referred some national and international conferences & journal published papers for the designing of smart automation systems and digital notice boards.


## III. HARDWARE

### A. ARM PROCESSOR WITH DEVELOPMENT BOARD :

It is an ARM development board which consists of 32-bit ARM7TDMI-S microcontroller in a tiny LQFP64 package. The microcontroller in it is LPC2148. There are LEDs, a 2X16 alphanumeric LCD also available in the development board. Other than these are, two UART, USB 2.0, JTAG, VGA, POWER JACK, BUZZER, SD/MMC and buttons.

The ARM7TDMI is a member of the Advanced RISC Machines (ARM) family of general purpose 32-bit microprocessors, which offer high performance for very low-power consumption and price. The ARM architecture is based on Reduced Instruction Set Computer (RISC) principles, and the instruction set and related decode mechanism are much simpler than those of micro programmed Complex Instruction Set Computers. This simplicity results in a high instruction throughput and impressive real-time interrupt response from a small and cost-effective chip.

The ARM7TDMI processor architecture as shown in Figure 1 employs a unique architectural strategy known as THUMB, which makes it ideally suited to high-volume applications with memory restrictions, or applications where code density is an issue

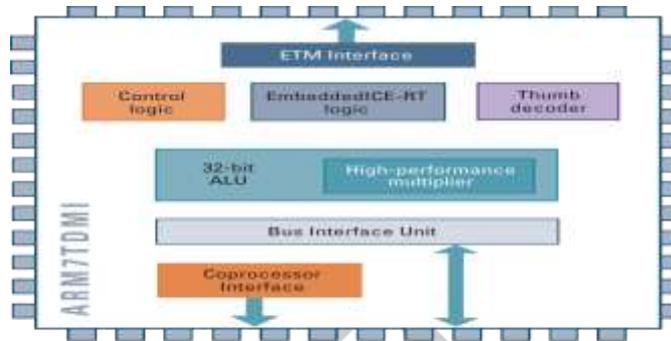

“Figure 1” ARM7TDMI Processor Architecture

LPC 2148 Development Board-LPC214X as shown in Figure 2 is an evaluation board for LPC2148 ARM7TMDI based microcontroller. The LPC2148 microcontroller has 512KB of internal flash and 32+8K RAM.




“Figure 2” LPC 2148 Development Board

The LPC2141/42/44/46/48 microcontrollers are based on a 16-bit/32-bit ARM7TDMI-SCPU with real-time emulation and embedded trace support, that combine the Microcontroller with embedded high-speed flash memory ranging from 32KB to 512 KB.128-bit wide memory interface and a unique accelerator architecture enable 32-bit code execution at the maximum clock rate. For critical code size applications, the alternative16-bit Thumb mode reduces code by more than 30 % with minimal performance penalty.

Due to their tiny size and low power consumption, LPC2141/42/44/46/48 pin configuration as shown in figure 3 are ideal for applications where miniaturization is a key requirement, such as access control and point-of-sale.

Serial communications interfaces ranging from a USB 2.0 Full-speed device, multiple UARTs, SPI, SSP to I2C-bus and on-chip SRAM of 8 KB up to 40 KB, make these devices very well suited for communication gateways and protocol converters, soft modems, voice recognition and low end imaging, providing both large buffer size and high processing power.

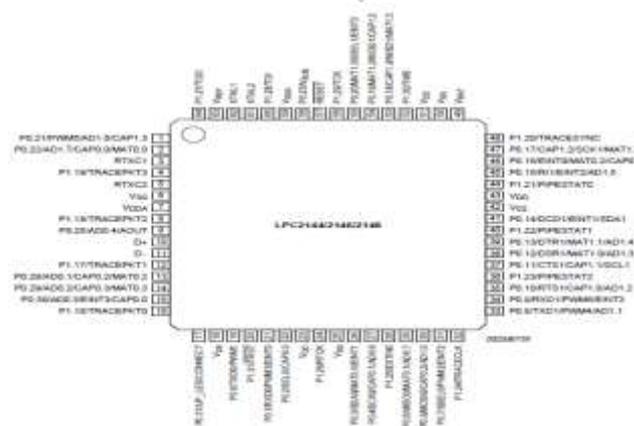

“Figure 3” LPC2148 Pin configuration

#### B. GSM SIM900 MODULE

A GSM SIM900 module has been interfaced with the 32-bit ARM processor based LPC2148 microcontroller. It is connected to LPC2148 through a USB to RS232 driver. The module contains a SIM card holder; RS232 based serial port for connection, an antenna for sending/receiving signals to the SIM and an LED as a status for power, signal and incoming call. It supports features like voice, data/fax, GPRS and SMS at both 900 MHz and 1800 MHz. Serial port baud rate is adjustable from 1200 to 115200 BPS (bauds per second). It receives only incoming calls to its SIM from the users through the antenna.

#### C. 16X2 ALPHANUMERIC LCD DISPLAY

This LCD has been used to display the notice sent by the user. It is a 16X2screen which means it can display 16 alphanumeric characters in each line and there are two lines for display in total which sums up to a maximum of 32 characters being displayed at a time. It has 8 data pins since each character is of 8 bits and three other pins namely, enable, read/write and register select. Whenever the enable pin is low, LCD is OFF and it is ON if the pin is high. The read/write pin, if high, reads the data from LCD and if low, writes data in it. The register select pin decides the type of data transferred through the data pins. If it is high, a character is written in LCD and if low, command is sent to LCD.

#### D. RELAY

A relay to drive a dc motor has been used. In order to control a circuit by a low-power signal with electrical isolation between control and controlled circuits, relay is used. Relay isolates low current circuit from high current circuit and the low current circuit either makes or breaks the high current path through the switch.

#### E. USB 2.0 TO RS232 SERIAL DB9 DRIVER


The GSM module has a db9 port and therefore, to connect it to ARM development board, the USB to RS232 driver used

#### F. ANDROID APPLICATION

An application named Home Automation has been used to switch on/off dc motors using on/off button and another button for typing and sending a notice to be displayed in the LCD.

### IV. SYSTEM DESCRIPTION

The proposed system block diagram as shown in Figure 5, which takes message from the Android Application sends to controller through GSM modem, as per the input signals devices should be controlled and displayed text in the LCD. The microcontroller receives an SMS through the GSM module on occurrence of one of the two events: (a) when a notice is sent by a user through application; (b) user clicks on ON/OFF button in the application.

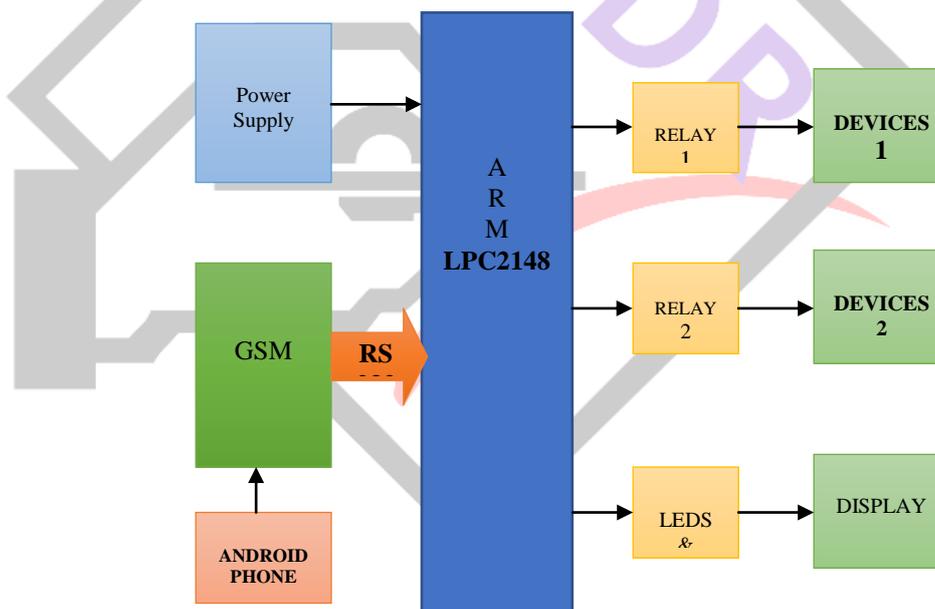

“Figure 4” TOTAL SYSTEM BLOCK DIAGRAM

#### A. DIGITAL CIRCULAR BOARD

- When the SIM inserted in the GSM module receives a notice as an SMS from a user, it saves the SMS and the data is transferred to LPC2148 through DB9 port of GSM to USB port of ARM development board connected by USB to RS232 driver.
- On receiving data from the GSM, LPC2148 sends a write command to the 16X2alphanumeric LCD followed by transfer of data to the 8 data pins of the LCD.
- The application named Home Automation is used to send message that gets displayed in the LCD.

#### B. SMART HOME AUTOMATION

- On clicking an ON/OFF button, an SMS is generated and sent by the smart automation to the SIM in GSM module.
- The GSM module transfers the data to LPC2148 as explained earlier.
- On receiving the data, LPC2148 sends a signal (logic 0 or logic 1) to the relay driver which turns the motors on/off as per the message.

## V. INTERFACING DESCRIPTION

### A. LPC2148 AND GSM MODULE INTERFACING

Microcontroller LPC2148 and the GSM SIM900 module communicate through any one of the two UART devices which are 16C550 present in the LPC2148 chip. In this project, UART0 has been used to connect to the GSM module. Among all the 64 pins of the microcontroller, pin P0.0 is the TXD0(Transmit) pin and pin P0.1 is the RXD0 (Receive) pin. The RXD0 and TXD0 pins of LPC2148 are connected to the Tx and Rx of the GSM Module respectively with jumper wires. The UART is initialized for communication to happen. The frequency of crystal oscillator (Fosc) is 12MHz and to maintain a frequency of 60MHz for the CPU (Fcclk) through phase locked loop (PLL) output, the multiplier is set as M=5 and the following registers are configured:- PLL0CON=0x01 PLL0CFG=0x24 The sequence fed is:- PLL0FEED=0xAA PLL0FEED=0x55

Hence, the peripheral clock frequency Fpclk is set as Fcclk/4. The baud rate generated is 9600 bauds per second To communicate with GSM, Attention (AT) commands are sent to GSM module through UART of LCP2148. So, initially to ensure successful connection with GSM module, the data "AT" is sent through UART. If in return "OK" is received by UART from GSM, then the connection is successful else not. After ensuring connection established, the GSM modem is set to text mode to read the SMS in text mode otherwise it gets displayed in binary mode. So, the string "AT+CMGF=1" is send to GSM module which sets the SMS at index 1 in text mode. Since, it is known that the latest SMS is always stored at index 1, the data sent is "AT+CMGF=1" where 1 is the index number of the message. Next, in order to read the message and send it for display the string "AT+CMGR=1" is sent to GSM. This string is sent to read the message at index number 1 as it is the latest SMS received by the SIM in GSM. Finally, after the message is read, it is sent to LCD in 4-bit mode and displayed.

### B. LPC 2148 AND LCD INTERFACING

The 16X2LCD has eight data pins and three special pins namely; read/write (R/W), enable (E) and register select (RS). It can be used in 4-bit or 8-bit mode to transfer data or command. In 8-bit mode, all the eight data lines of LCD are connected to eight I/O pins of LPC2148 along with three other pins also connected to the microcontroller but in 4-bit mode, only four data lines are connected to the microcontroller. Here, 4-bit mode has been used to display.

In 4-bit mode, the data lines D0-D3 of LCD are not connected and D4-D7 is connected to pins P0.19-P0.22 of LPC2148. The R/W, E and RS pins are connected to pins P0.16, P0.17 and P0.18 pins of LPC2148 respectively. Initially, the LCD is initialized and then the data is sent to it to get it displayed. RS pin, if high, selects the data register and LCD interprets any data sent to it as data to be displayed and if RS pin is low, command register is selected so the data sent to LCD is interpreted as a command by the LCD. The enable pin is used to enable transfer of command or data to LCD from microcontroller.

**LCD initialization:** For initialization, the pins R/W is kept low (write), RS is kept low (command register selected) and then command is sent through the 4-bit mode. But to place the command into command register, E pin is transitioned from high to low each time a byte is sent to the LCD. The commands sent for initialization in hexadecimal are, 28H, 20H, 06H, 01H and 80H.

**Sending data to LCD:** Sending of data involves following steps:-

- R/w is set low (write operation selected).
- RS is set high (data register selected).
- The data byte is sent through the 4 data lines.
- E pin is transitioned from high to low for data to be placed into data register.

The above steps are repeated to send other bytes of data.

### C. LPC 2148 AND RELAY WITH LOAD INTERFACING

In this project, single relay is used to drive a fan using dc motor. The relay requires a driver IC ULN2803 to make interfacing possible between the low logic level digital circuitry in LPC2148 and the high voltage level required by the relay. LPC2148 gives output of 5V whereas relay requires 12V to operate, hence ULN2803 is required. ULN2803 IC has eight inputs and eight corresponding outputs.

It consists of eight Darlington pair of NPN transistors. Here, a single relay has been used so input pin P0 of ULN2803 is connected to pin P1.20 of LPC2148 and the corresponding output pin of ULN2803 is connected to the relay. The dc motor used to drive the fan is connected to the relay. There is an input in the relay which is connected to a triggering coil. When the coil gets energized, relay turns on and the switch inside it closes so the positive terminal of output gets connected to +12V and if relay is off (coil de-energized), positive output terminal gets grounded. The ULN2803 input pin P0 is supplied a logic 1 (5V) by the pin P1.20 of LPC2148 to turn it on and drive the relay which in turn drives the motor to rotate the fan.

### D. ANDROID APPLICATION (SMART HOME AUTOMATION)

The android application designed, acts as a communication interface between the SIM in GSM module and the user. The interface is quiet user friendly and easy to access. On opening the application, its homepage provides two functionalities:-

#### **Fan control:**

- On clicking the fan control option in homepage, there are two options visible, fan off and fan on.
- To switch on the fan, fan on option is clicked and similarly to switch it off, fan off is clicked.
- After clicking fan on/off, the application takes few seconds to send an SMS during which, "Wait request on process" message gets displayed in lower part of the screen
- On clicking fan on/off, the application automatically sends an SMS with a message written "ON" in it if fan on is clicked or "OFF" if fan off is clicked.
- The GSM receives the message and delivers it to LPC2148 which, on retrieving the message, reads it and sends signal accordingly to switch on/off the motor.
- As soon as the message is sent completely by the application, a message, Fan on/off gets displayed depending on what option is clicked. Thus, the home appliances are controlled in this way using the application.

**Circular board:**

- On clicking the notice board option in homepage, a blank text area appears with initially a message "Write notice" written in it.
- The notice to be displayed is typed in the text area. For example, "Paper Presentation at 4:30 pm" is to be displayed which is typed in the text area.
- After typing the message, the send notice option below the screen is clicked to send it.
- After clicking, while the phone delivers the message, at that time, the message, "Wait request in progress" gets displayed in the lower part of screen

As soon as the message gets delivered, "Notice sent" message pops up as shown in figure 9. Thus, the notices can be delivered this way through the application to get them displayed.

**VI. SOFTWARE****A. KEIL SOFTWARE**

In our proposed system, we can write the code in Keil software for the purpose of Simulation, Compilation, Debugging, Execution and conversion of HEX CODE, Keil development tools for the ARM Microcontroller Architecture support every level of software developer from the professional applications engineer to the student just learning about embedded software development. The industry-standard Keil C Compilers, Macro Assemblers, Debuggers, Real-time Kernels, Single-board Computers, and Emulators support all 8051 derivatives and help you get your projects completed on schedule

**B. ANDROID SOFTWARE**

**Android software development** is the process by which new applications are created for the Android operating system. Applications are usually developed in Java programming language using the Android software development kit (SDK), but other development environments are also available.

**C. FLASH MAGIC**

Flash Magic is a PC tool for programming flash based microcontrollers from NXP using a serial or Ethernet protocol while in the target hardware. Double click on Desktop ICON. Flash Magic provides a clear and simple user interface to these features and more as described in the following sections. Under Windows, only one application may have access the COM Port at any one time, preventing other applications from using the COM Port. Flash Magic only obtains access to the selected COM Port when ISP operations are being performed. This means that other applications that need to use the COM Port, such as debugging tools, may be used while Flash Magic is loaded. Note that in this manual third party Compilers are listed alphabetically. No preferences are indicated or implied.

**VII. ACKNOWLEDGMENT**

The successful completion of any task would be incomplete without greeting those who made it possible and whose guidance and encouragement made the effort taken a success. Extend heartfelt gratitude to the Almighty for giving me strength in proceeding with this project titled "**GSM MOBILE BASED SMART AUTOMATION AND DIGITAL CIRCULAR BOARD**" and special thanks to the Management of our college for providing necessary arrangements to carry out this project. We would be quite lost without the guidance of the M.Tech Teaching staff of SRI SIVANI INSTITUTE OF TECHNOLOGY, Srikakulam. I also thank other teaching and non-teaching staff for their assistance and help. Above all, I thank my parents. I feel deep sense of gratitude for my family who formed part of my vision. Finally I thank one and all that have contributed directly or indirectly to this project.

**REFERENCES**

- [1] Aniket Pramanik, Rishikesh, Vikash Nagar, Satyam Dwivedi, Biplav Choudhury "GSM based Smart Home and Digital Notice Board" in 2016 International Conference on Computational Techniques in Information and Communication Technologies (ICCTICT), 2016 IEEE International Conference, 978-1-5090-0082-1
- [2] R. Teymourzadeh, S. Ahmed, K. W. Chan, and M. V. Hoong, "Smart GSM based home automation system," in Systems, Process Control (ICSPC), 2013 IEEE Conference on, Dec 2013, pp. 306–309.
- [3] H. Elkamchouchi and A. ElShafee, "Design and prototype implementation of sms based home automation system," in Electronics Design, Systems and Applications (ICEDSA), 2012 IEEE International Conference on, Nov 2012, pp. 162–167.
- [4] M. S. Khandare and A. Mahajan, "Mobile monitoring system for smart home," in Emerging Trends in Engineering and Technology (ICETET), 2010 3rd International Conference on. IEEE, 2010, pp. 848–852.
- [5] J.-V. Lee, Y.-D. Chuah, and C.-T. Chai, "A multilevel home security system (mhss)," International Journal of Smart Home, vol. 7, no. 2, 2013.
- [6] R. Anandan, "Wireless home and industrial automation security system using GSM," Journal of Global Research in Computer Science, vol. 4, no. 4, pp. 126–132, 2013.
- [7] V. M. Ibrahim, A. A. Victor, and S. Musa, "Gsm based anti-theft security system using at&t command," International Journal of Computational Engineering Research. Vol2, no. 5, 2012.