

BALANCED LIGHT ENHANCEMENT IN IMAGES WITH MODIFIED HISTOGRAM AND RETINEX COMBINATION

¹Jagruti Sahu, ²Dr. Prashant Jain

¹M.E. Scholar, ²Professor
Jabalpur Engineering College, Jabalpur, MP

Abstract: From last few years, there has been substantial work on image processing and wide improvements being carried out in image processing including resolutions and sensitivity. Despite these improvements, still there is a problem to capture a high dynamic range images in low-light conditions especially when light is very low. If the intensity of noise is higher than the signal then the conventional de-noising techniques cannot work properly. For the said problem there are many approaches being developed for low-light image enhancement but still Low contrast and noise remains a barrier to visually pleasing images in low light conditions. To capturing images in concerts, parties, social gatherings, and in security monitoring situations are still an unanswered problem. In such conditions the image enhancement of low quality image is a really tedious job. This new algorithm enhances the luminance of low-light level images while preserving image contrast and details. The study is further going on to find a technique so that more accuracy can be obtained in image enhancement.

Keywords: QA: quality assessment, LLI: low light images, LIME: Low-light Image Enhancement via Illumination Map Estimation, LOE: Lightness Order Error

I-INTRODUCTION

Over the previous couple of years, there has been a in depth capability improvement were take place in digital cameras within the space of resolutions and sensitivity But still there is limitation in modern digital cameras in capturing high dynamic range images in low-light situation [1]. Noise in image frames creates the serious poverty of image quality [3]. The noise remains as large residual errors after motion compensation [3]. The typical digital cameras can only capture images with a dynamic range of thousands in magnitude just because of that limited dynamic range of digital cameras, poor visibility causes due to overexposure in bright regions and underexposure in dark regions of a captured image [4]. During processing of very dark images mostly specific algorithms being adopted for enhancement process which causes of low dynamic range images remains largely untouched [5]. It is always expected that the digital camera should work effectively in all types of lighting and weather conditions but the majority of these cameras are failed to capture images in low light state, hence the low quality of images and being captured [6]. The prime intention of image enhancement is to bring out detail information that is hidden in image [7]. Image up gradation or enhancement may be defined as to give an input of low light or low quality image and collect the high quality image output for specific applications. Images are the integral part of our life and that's why it's an active subject which brings much attention in recent years [10]. Color of the objects with similar background, low intensity of light (low light condition) and the unknown level of darkness while capturing an image, make it more complicated [10]. This investigation is going to present a survey of different types of methods and technologies that have been used for image enhancement and will help to design and develop a technology which will deliver more accuracy in image enhancement.

II-METHODOLOGY

Proposed an algorithm which combines the merits of transform color space algorithm and wavelet transform algorithm. First, the RGB image is converted to the HSI color space, Then histogram equalization is applied to intensity component ,saturation component and hue component individually to enhance the contrast of image and then the intensity component I is divided into high and low frequency sub-bands with wavelet transform and then Retinex algorithm is applied to the low-frequency sub-band to reduce the effect of light and adjust image luminance, an interpolation filter is applied to high-frequency sub-band to achieve the enhancement and de-noising for the image details. Finally, we use the inverse wavelet transform to reconstruct the I component and then the reconstructed component I will be synthesized with H and S components to get a clear RGB image, and the proposed algorithm is represented by following flowchart

ALGORITHM ADOPTED: Let input image is x which is a RGB image
First Histogram Equalization need to be done

$$I = \frac{1}{3}(R + G + B)$$

$$A = \cos^{-1} \left(\frac{(R - G) + (R - B)}{2\sqrt{(R - G)^2 + (R - B)(G - B)}} \right)$$

$$H = A \text{ when } G > B$$

$$H = 360 - A \text{ when } B > G$$

$$S = 1 - 3 \left(\frac{\text{Min}(R, G, B)}{I} \right)$$

Let 'img' is the HSI image and its intensity block is of 3x3 is as below, and the intensity need to enhance with K coefficient

$$I = \begin{bmatrix} a & b & a \\ c & d & b \\ d & b & e \end{bmatrix}$$

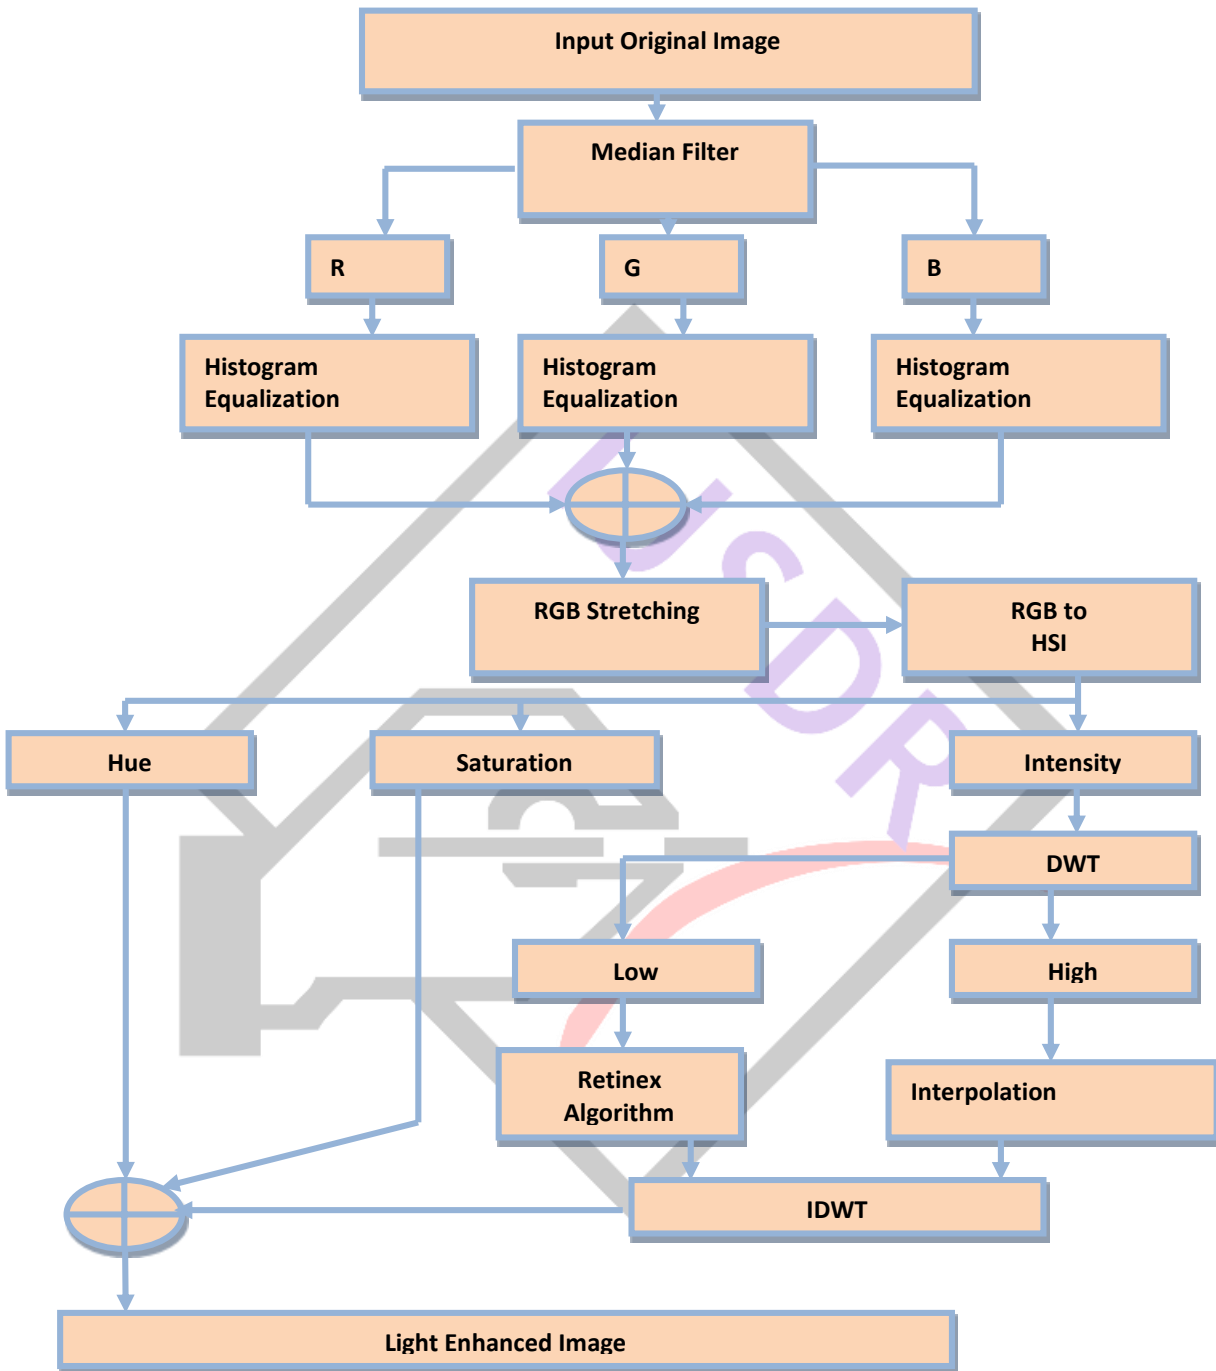


Figure 1 Flow diagram of proposed work

Table 1 Histogram equalization algorithm

Pixel intensity	a	B	C	D	e
Pixel value	f1	f2	f3	f4	f5
Probability	f1/9	f2/9	f3/9	f4/9	f5/9
Cumulative probability	F1/9	$\frac{f1 + f2}{9}$	$\frac{f1 + f2 + f3}{9}$	$\frac{f1 + f2 + f3 + f4}{9}$	$\frac{f1 + f2 + f3 + f4 + f5}{9}$
CP*k	K*F1/9	$\left\{ \frac{f1 + f2}{9} \right\} * K$	$\left\{ \frac{f1 + f2 + f3}{9} \right\} * K$	$\left\{ \frac{f1 + f2 + f3 + f4}{9} \right\} * K$	$\left\{ \frac{f1 + f2 + f3 + f4 + f5}{9} \right\} * K$
Floor rounding	Na= floor(K*F1/9)	$Nb = floor \left[\left\{ \frac{f1 + f2}{9} \right\} * K \right]$		$Nc = floor \left[\left\{ \frac{f1 + f2 + f3}{9} \right\} * K \right]$	
		$Nd = floor \left[\left\{ \frac{f1 + f2 + f3 + f4}{9} \right\} * K \right]$		$Ne = floor \left[\left\{ \frac{f1 + f2 + f3 + f4 + f5}{9} \right\} * K \right]$	

$$I_e = \begin{bmatrix} Na & Nb & Na \\ Nc & Nd & Nb \\ Nd & Nb & Ne \end{bmatrix}$$

I_e is the intensity frame of HSI image of MxN DWT applied on 'I'

Table 1 below shows the symlet type 4 HPF and LPF filter coefficients. Proposed work use 'sym4' type wavelet for decomposition of Cover image, figure 1 below shows HPF and LPF decomposition using DWT.

Table 2 Sym4 filter coefficients

Sym4	$h_0 = -0.0757657148, h_1 = -0.0296355276$ $h_2 = 0.4976186676, h_3 = 0.8037387518$ $h_4 = 0.2978577956, h_5 = -0.0992195436$ $h_6 = -0.0126039673, h_7 = 0.0322231006$	$g_0 = -0.0322231006, g_1 = -0.0126039673$ $g_2 = 0.0992195436, g_3 = 0.2978577956$ $g_4 = -0.8037387518, g_5 = 0.4976186676$ $g_6 = 0.0296355276, g_7 = -0.0757657148$
------	--	--

$$I_e(n)_L = \sum_{k=-\infty}^{\infty} I_e(k)g(2n - k)$$

$$I_e(n)_H = \sum_{k=-\infty}^{\infty} I_e(k)h(2n - k)$$

let $I_e(n)_L = p$

let $I_e(n)_H = q$

Retinex: let (x,y) are the pixels coordinates of 'p' in space domain

then W is the reflection component and Z illumination component then

$$p(x, y) = W(x, y)Z(x, y)$$

$$where Z(x, y) = \sum_{r=-\infty}^{\infty} \sum_{s=-\infty}^{\infty} F(r, s).p(x - r, y - s)$$

$$F(x, y) = \lambda. e^{-\frac{(x^2+y^2)}{c}}$$

Where c is Gaussian scale is a constant that makes F(x, y) equal to 1.

$$p(x, y) = W(x, y)\{F(x, y) * p(x, y)\}$$

$$w(x, y) = \log_{10}(W(x, y)) = \log_{10}(p(x, y)) - \log_{10}(F(x, y) * p(x, y))$$

$w(x, y)$ will betheratinexenhanceof $p(x, y)$

let (u,v) are the pixels coordinates of 'q' in space domain

Fuzzy Enhancement

$$F_{(u,v)} = \frac{q_{(u,v)} - q_{min}}{q_{max} - q_{min}}$$

$$NF_{(u,v)} = \frac{1}{2} + \left(F_{(u,v)} - \frac{1}{2} \right)^{\frac{1}{3}}$$

$$MF_{(u,v)} = NF_{(u,v)}(q_{max} - q_{min}) + q_{min}$$

$$Mq = MF_{(u,v)} * q_{(u,v)}$$

Mq is the final enhanced high frequency component q

$$\text{Mod}_I = \sum_{n=-\infty}^{\infty} \left\{ Mq \left(\frac{n}{2} \right)_L \pm W \left(\frac{n}{2} \right)_H \right\}$$

III-RESULTS

Parameters for the valuation of the work are Peak Signal to Noise Ratio (PSNR), Mean square error (MSE), Mean, Standard Deviation (STD), Gradient (Grad), Entropy (Ent) and Lightness order error (LOE)

MSE: Mean square error is the error estimation between two image and PSNR is the error amount in the image, MSE can be computer as below

$$\text{MSE} = \frac{1}{rc} \sum_{i=1}^{RW} \sum_{j=1}^{CL} (x_{ij} - y_{ij})^2$$

Where 'r' is the number of rows in the image 'c' is the columns in the image x is input image before data hiding, y is the output image after data hiding.

PSNR: Peak Signal to Noise Ratio can be computed as

$$\text{PSNR} = 20 \log_{10} \left(\frac{256^2}{\text{MSE}} \right)$$

Mean: The mean, indicated by μ (a lower case Greek mu), Mean [1, 2] is most basic of all statistical measure. Means are often used in geometry and analysis; a wide range of means have been developed for these purposes. In contest of image processing filtering using mean is classified as spatial filtering and used for noise reduction. In this section we have discussed about various type of mean and analyzed their use for removing various type of noise in image processing

$$\mu = \frac{1}{rc} \sum_{i=1}^{RW} \sum_{j=1}^{CL} x_{ij}$$

Standard Deviation (STD): It is a most widely used measure of variability or diversity used in statistics. In terms of image processing it shows how much variation or "dispersion" exists from the average (mean, or expected value). A low standard deviation indicates that the data points tend to be very close to the mean, whereas high standard deviation indicates that the data points are spread out over a large range of values. Mathematically standard deviation is given by

$$\text{STD} = \sqrt{\frac{1}{rc-1} \sum_{i=1}^{RW} \sum_{j=1}^{CL} \left(x_{ij} - \frac{1}{rc-1} \sum_{i=1}^{RW} \sum_{j=1}^{CL} x_{ij} \right)^2}$$

Gradient (Grad): An image gradient is a directional change in the intensity or color in an image. The gradient of the image is one of the fundamental building blocks in image processing.

$$\text{grad} = \frac{1}{rc} \sum_{i=1}^{RW} \sum_{j=1}^{CL} x_{ij} - x_{i(j-1)}$$

Entropy (Ent): Entropy is a statistical measure of randomness that can be used to characterize the texture of the input image

$$\text{Ent} = \sum_{i=1}^{RW} \sum_{j=1}^{CL} p_{ij} \log_2 p_{ij}$$

Where p_{ij} is the histogram of the image x_{ij}

Lightness order error (LOE): LOE measure is based on the lightness order error between original image X and enhanced image Y. The LOE measure is defined as

$$\text{LOE} = \sum_{i=1}^{RW} \sum_{j=1}^{CL} RD_{ij}$$

RD_{ij} is the relative order difference

$$RD_{ij} = \sum_{i=1}^{RW} \sum_{j=1}^{CL} \left(U(L_x, L_{ij_x}) \oplus U(L_y, L_{ij_y}) \right)$$

the lightness L of an image is the maximum of its three color channel.

$$L = \text{MAX}_{(r,g,b)}(X_{ij})$$

Proposed work has better PSNR and low MSE as compare to available work with modified image.

Simulation is been taken for five test images 'house', 'Tower', 'Boy', office1' and office2'

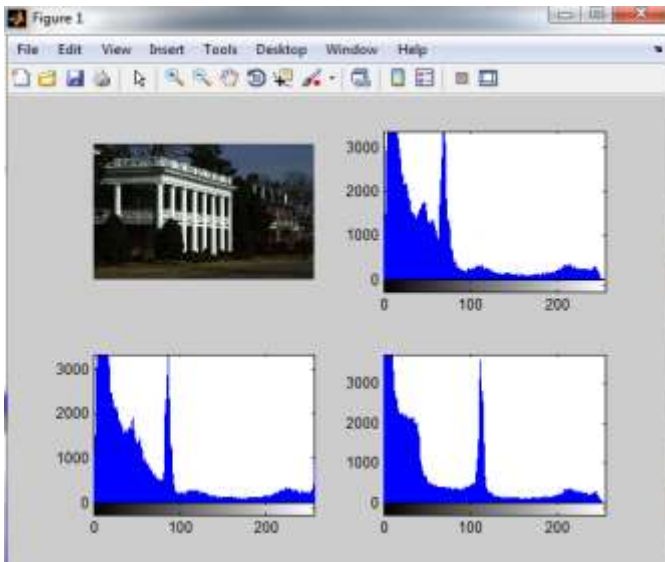


Figure 2 Histogram analysis of test image 'house'

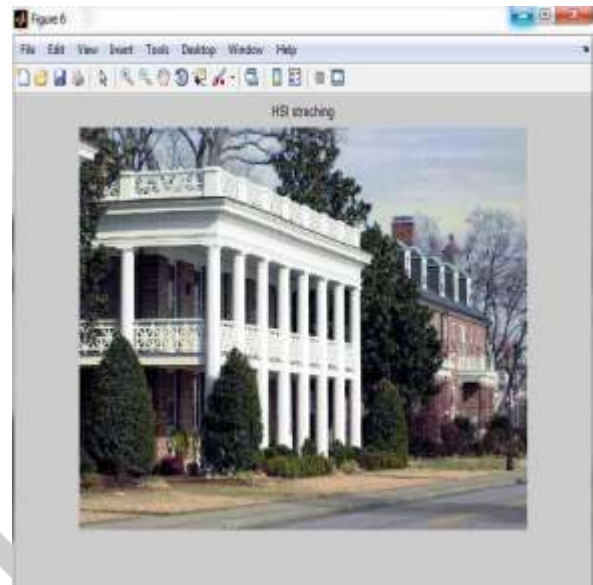


Figure 3 Enhanced test image 'house'

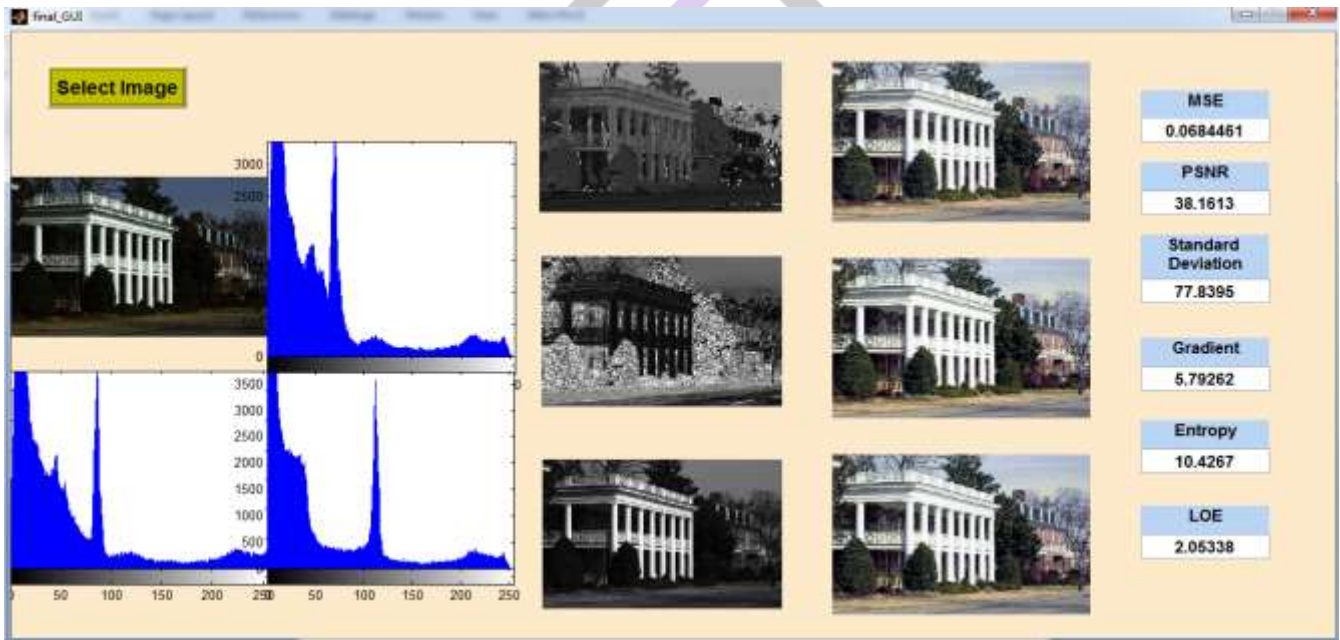
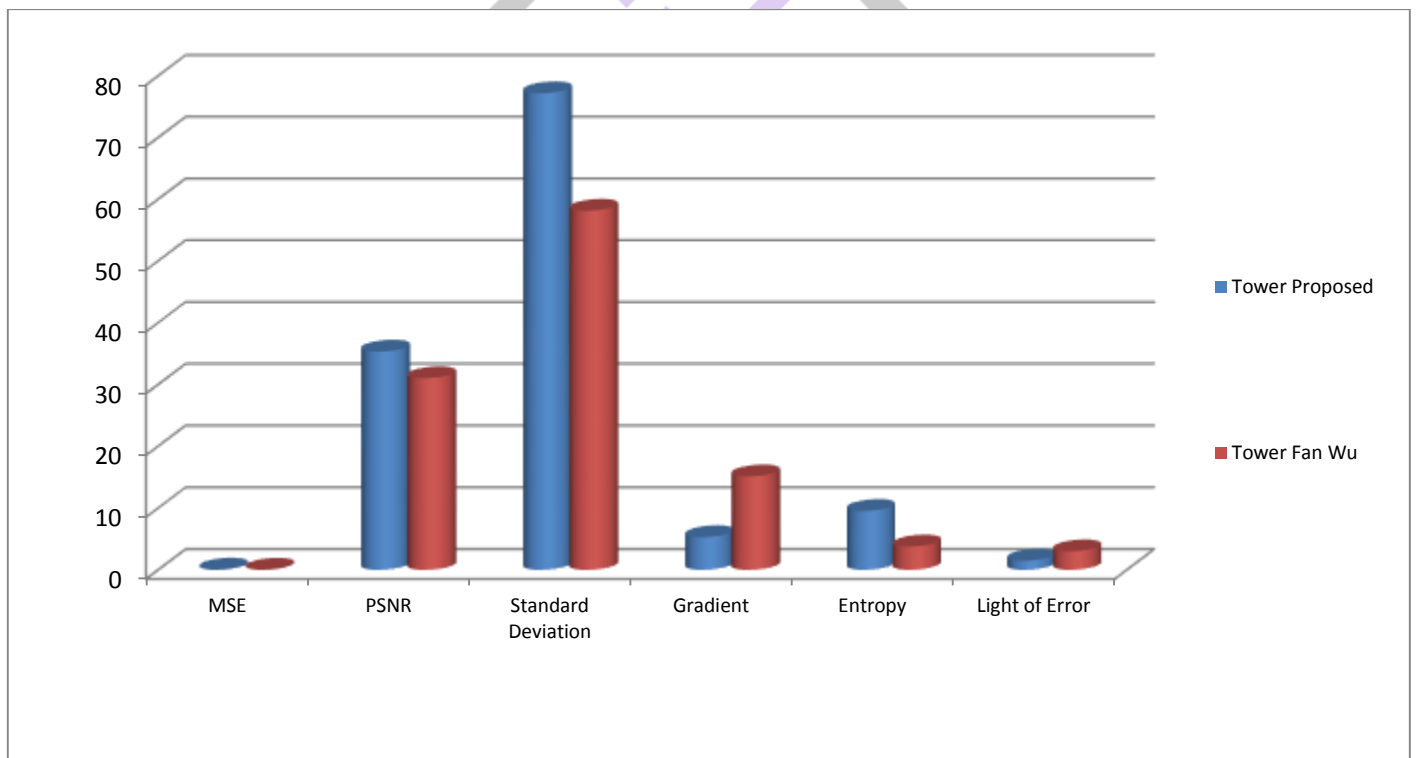
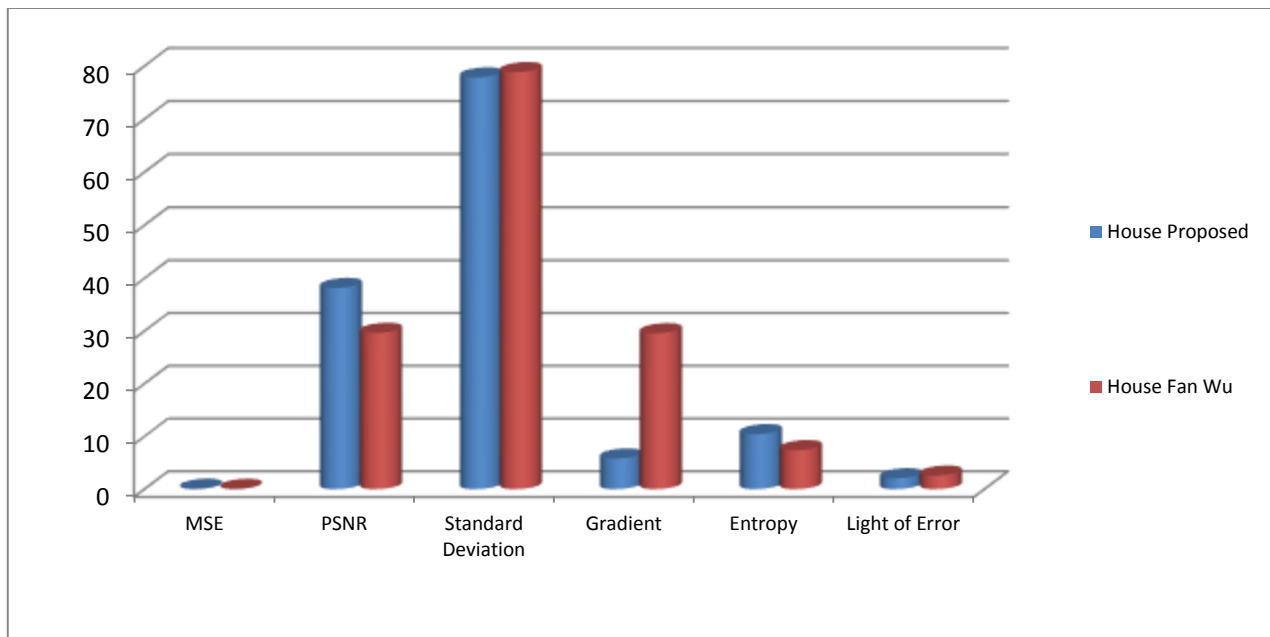
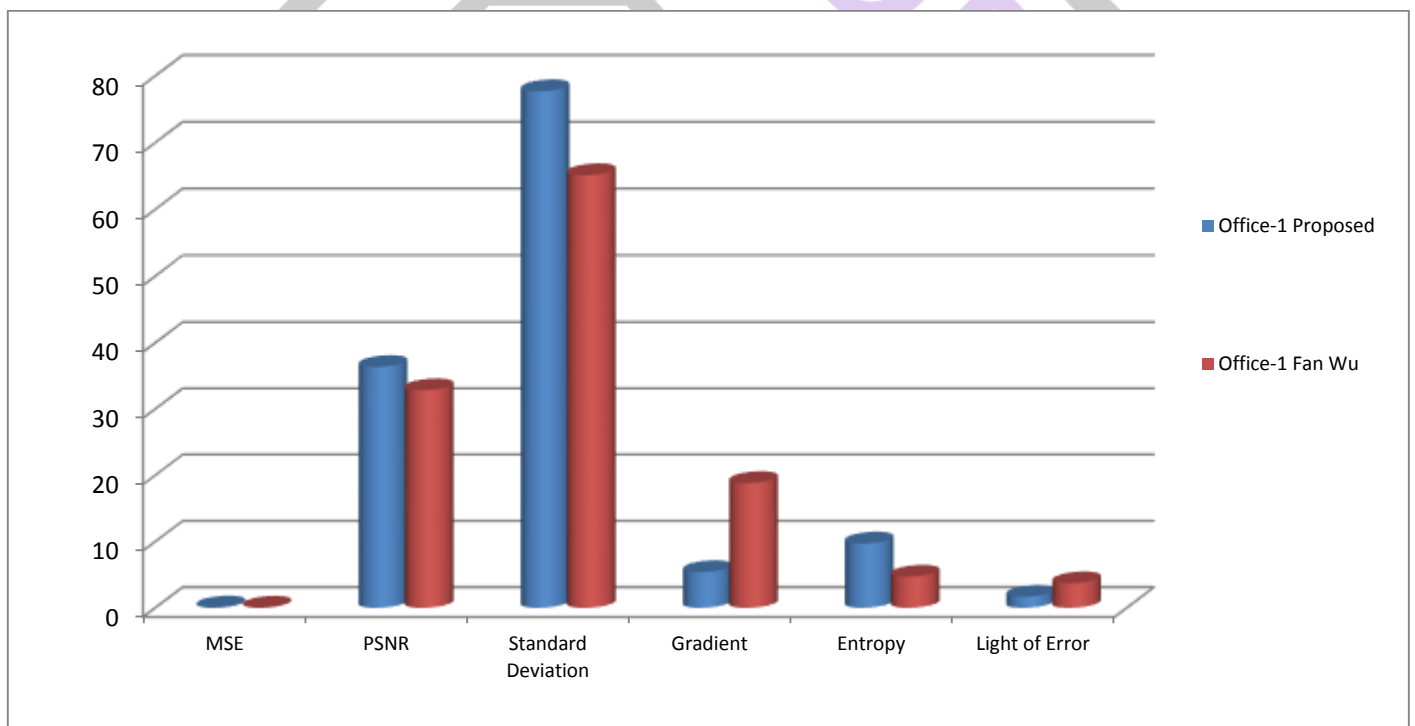
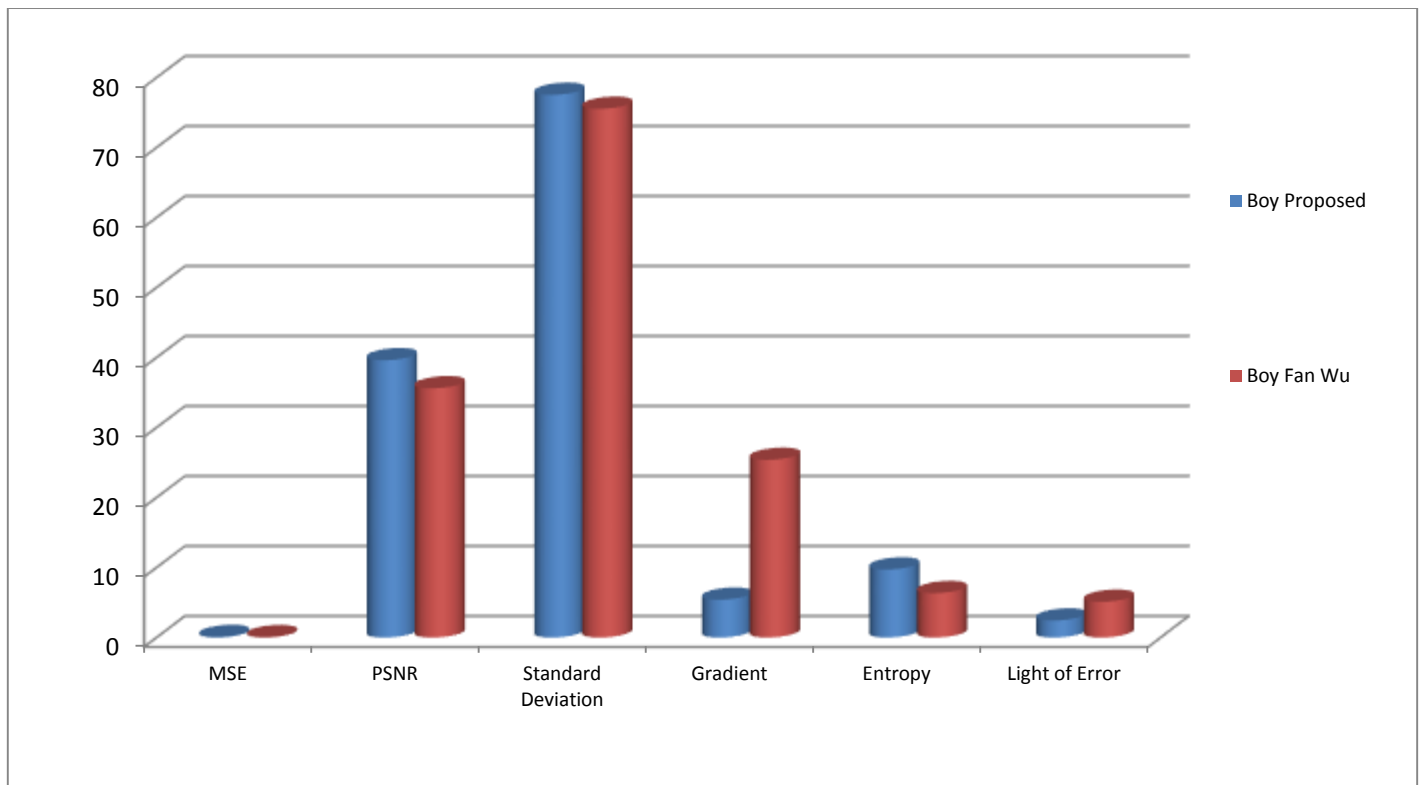


Figure 2 GUI for the test image House

We observe results from MATLAB that test images of 'house', 'Tower', 'Boy', office1' and office2' for the proposed work, the work done by Fan Wu and also compare difference between their work implementation and proposed work implementation and it can be observe that proposed work has better in all parameter for all test images.

In the below graphs, there is a comparison between proposed method results and Fan Wu Paper, Here in graph, The red color shows the results of Fan Wu method and blue color shows proposed method results.





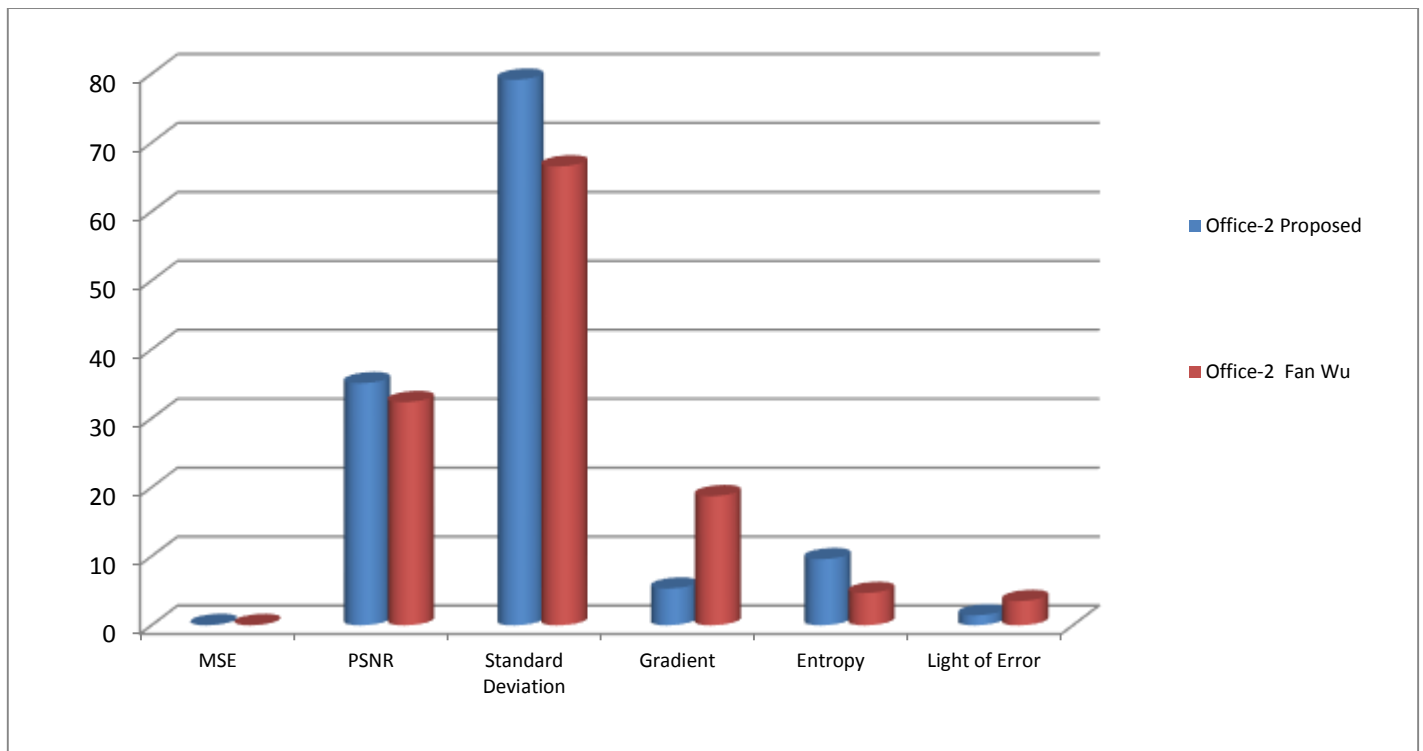


Table 4 Comparative result

From the above graphs, it can be observed that the proposed work is best in parameters of MSE, PSNR, LOE, Standard Deviation, Gradient and Entropy with all other work for the genuine comparison we have chosen the same images which were selected by base works.

III- CONCLUSION

A low-light image enhancement algorithm is presented in the paper. By decomposing a low-light image into the Red, green and blue component and performing histogram equalization in all R, G and B components color stretching has been performed. Further illumination component extracted, it offers a solution to expand illumination and enhance image details separately. Specifically, the illumination component is processed using DWT, retinex and interpolation methods. This solution enhances low-light images and effectively avoids distortions (for example color) and annoying artifacts (e.g., blurring, halo). Then, the final result is obtained by concatenation of illumination component with hue and saturation. Experimental results demonstrate that the enhanced images by the proposed method are visually pleasing by subjective test and the performance of the proposed method outperforms the existing methods in terms of both gradient, standard deviation, MSE, LOE, SNR and entropy. Moreover, the proposed algorithm is efficient because the computation complexity is less than [1]. The proposed method has great potential to implement in real-time low-light image processing.

REFERENCES

- [1] Fan Wu, KinTak U, Low-Light Image Enhancement Algorithm Based on HSI Color Space, 2017 10th International Congress on Image and Signal Processing, BioMedical Engineering and Informatics (CISP-BMEI 2017), 978-1-5386-1937-7/17©2017 IEEE
- [2] Xiaojie Guo, Member, IEEE, Yu Li, Member, IEEE, and Haibin Ling, Member, IEEE LIME: Low-light Image Enhancement via Illumination Map Estimation, IEEE TRANSACTIONS ON IMAGE PROCESSING, National Natural Science Foundation of China under grant 61402467, the US National Science Foundation Under grants CNS-1618398 and IIS-1350521, 2016
- [3] Hyo-Gi Lee, Seungjoon Yang, and Jae-Young Sim, Color Preserving Contrast Enhancement for LowLight Level Images based on Retinex, Proceedings of APSIPA Annual Summit and Conference 2015, 16-19 December 2015, 978-988-14768-0-7©2015 APSIPA
- [4] Takuya Mikami, Daisuke Sugimura and Takayuki Hamamoto, CAPTURING COLOR AND NEAR-INFRARED IMAGES WITH DIFFERENT EXPOSURE TIMES FOR IMAGE ENHANCEMENT UNDER EXTREMELY LOW-LIGHT SCENE, 978-1-4799-5751-4/14/2014 IEEE
- [5] Xiankun Sun, Huijie Liu, Shiqian Wu, Zhijun Fang, Chengfan Li, and Jingyuan Yin, Low-Light Image Enhancement Based on Guided Image Filtering in Gradient Domain, Hindawi, International Journal of Digital Multimedia Broadcasting, Volume 2017, Article ID 9029315, 13 pages, <https://doi.org/10.1155/2017/9029315>
- [6] Pixel Binning Yoonjong Yoo, Jaehyun Im and Joonki Paik, Low-Light Image Enhancement Using Adaptive Digital, *Sensors* 2015, 15, 14917-14931; doi:10.3390/s150714917, ISSN 1424-8220, www.mdpi.com/journal/sensors
- [7] Zhenqiang Ying, Ge Li, Yurui Ren, Ronggang Wang, and Wenmin Wang, A New Low-Light Image Enhancement Algorithm using Camera Response Model National Science Foundation of China (No.U1611461), Shenzhen Peacock Plan

- (20130408183003656), and Science and Technology Planning Project of Guangdong Province, China (No. 2014B090910001 and No. 2014B010117007).
- [8] Zhuang Feng, Low-Light Image Enhancement by Refining Illumination Map with Self-guided Filtering, 2017 IEEE International Conference on Big Knowledge, 978-1-5386-3120-1/17 2017 IEEE, DOI 10.1109/ICBK.2017.37
- [9] Vijay Kumar¹, Priyanka Gupta, Importance of Statistical Measures in Digital Image Processing International Journal of Emerging Technology and Advanced Engineering Website: www.ijetae.com (ISSN 2250-2459, Volume 2, Issue 8, August 2012)
- [10] Minjae Kim, Dubok Park, David K. Han and Hanseok Ko, "A Novel Framework for Extremely Low-light image Enhancement," IEEE International Conference on Consumer Electronics (ICCE), 2014.
- [11] Zhengying Chen, Tingting Jiang and Yonghong Tian, "Quality Assessment for Comparing Image Enhancement Algorithms," IEEE, Computer Vision Foundation, CVPR, 2014.
- [12] Er. Mandeep Kaur, Er. Kiran Jain and Er Virender Lather, "Study of Image Enhancement Techniques: A Review," International Journal of Advanced Research in Computer Science and Software Engineering, Volume 3, Issue 4, April 2013, ISSN: 2277 128X.
- [13] Chi-Yi Tsai, Member, "A Fast Dynamic Range Compression with Local Contrast Preservation Algorithm and Its Application to Real-Time image Enhancement," IEEE Transactions On Multimedia, Vol. 14, No. 4, August 2012.
- [14] Xiankun Sun, Huijie Liu, Shiqian Wu, Zhijun Fang, Chengfan Li, and Jingyuan Yin¹, International Journal of Digital Multimedia Broadcasting, Hindawi, International Journal of Digital Multimedia Broadcasting Volume 2017, Article ID 9029315, 13 pages, <https://doi.org/10.1155/2017/9029315>
- [15] Yoonjong Yoo, Jaehyun Im and Joonki Paik, Low-Light Image Enhancement Using Adaptive Digital Pixel Binning, Sensors 2015, 15, 14917-14931; doi:10.3390/s150714917
- [16] Zhenqiang Ying, Ge Li, Yurui Ren, Ronggang Wang, and Wenmin Wang, A New Low-Light Image Enhancement Algorithm using Camera Response Model work was supported by the grant of National Science Foundation of China (No.U1611461), Shenzhen Peacock Plan (20130408183003656), and Science and Technology Planning Project of Guangdong Province, China (No. 2014B090910001 and No. 2014B010117007, IEEE Explore
- [17] Zhuang Feng, Shijie Hao, Low-Light Image Enhancement by Refining Illumination Map with Self-guided Filtering, 2017 IEEE International Conference on Big Knowledge
- [18] Snehal O. Mundhada and Prof. V. K. Shandilya, "Image Enhancement and Its Various Techniques," International Journal of Advanced Research in Computer Science and Software Engineering, Volume 2, Issue 4, April 2012, ISSN: 2277 128X.
- [19] Yunbo Rao, Leiting Chen, "A Survey of image Enhancement Techniques," Journal of Information Hiding and Multimedia Signal Processing Ubiquitous International, Volume 3, Number 1, January 2012, ISSN 2073-4212.
- [20] Qing Xu¹, Hailin Jiang, Riccardo Scopigno and Mateu Sbert, "A New Approach For Very Dark image Denoising And Enhancement," IEEE 17th International Conference on Image Processing, Hong Kong, September 26-29, 2010.
- [21] A. Buades, B. Coll, and J.M. Morel, "A Review Of Image Denoising Algorithms, With A New One," Siam Journal On Multiscale Modeling and Simulation, 490-530, 4, 2 (2005).
- [22] Adrian Stern, Doron Aloni and Bahram Javidi, "Experiments With Three-Dimensional Integral Imaging Under Low Light Levels," IEEE Photonics Journal, Volume 4, Number 4, August 2012.
- [23] Gary J. Sullivan, Fellow, Jill M. Boyce, Senior Member, Ying Chen, "Standardized Extensions of High Efficiency image Coding (HEVC)," IEEE Journal of Selected Topics In Signal Processing, Vol. 7, No. 6, December 2013.
- [24] HDR dataset <https://hdrplusdata.org/>